


Control My Spa

Quick Start | Spa Touch 4 Panel

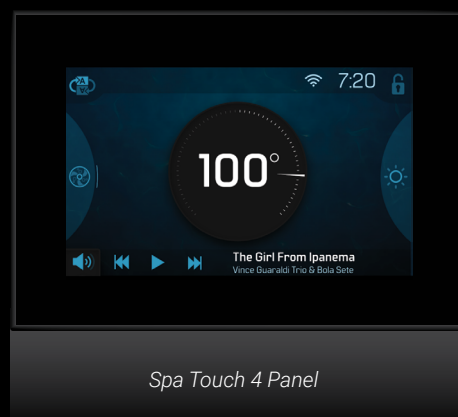

WARNING

There are no user serviceable parts inside the system. All connections must be made by a qualified electrician in accordance with the country or local electrical codes in effect at the time of installation.

Follow these steps to connect Control My Spa to your hot tub.

STEP 1

Power off the hot tub at the circuit breaker or GFCI.

STEP 2

Remove the lid of the control system. There is a wiring diagram on the inside surface of the lid. On the wiring diagram, locate where to connect the Spa Touch 4 (ST4) panel to the circuit board (view pages 5, 6, 7). Connect the ST4 panel to the circuit board.

STEP 3


Reinstall the lid onto the system enclosure.

STEP 4

Power On the control system at the circuit breaker or GFCI.

STEP 5


On the ST4 panel, swipe down here (A) and tap Connections (B).

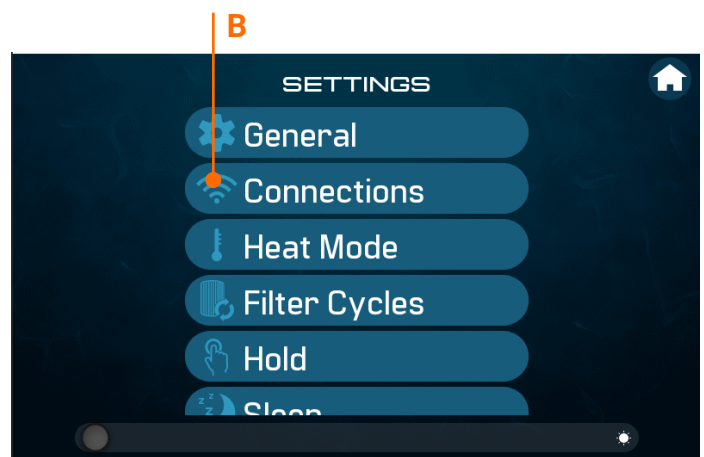

C


STEP 6

Connect to your WiFi network (C).


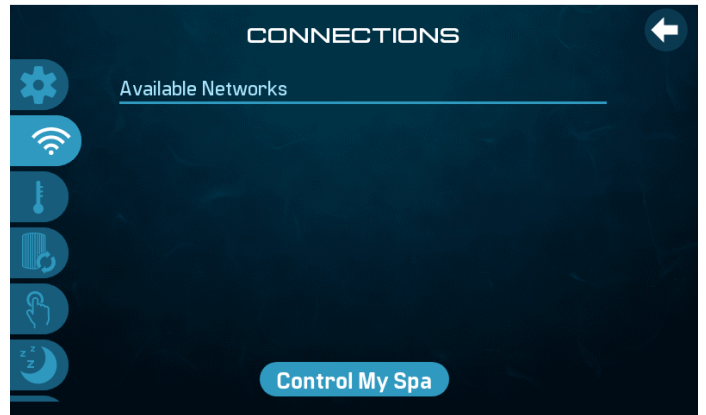


STEP 7

Launch the Control My Spa app on your phone and follow these prompts.


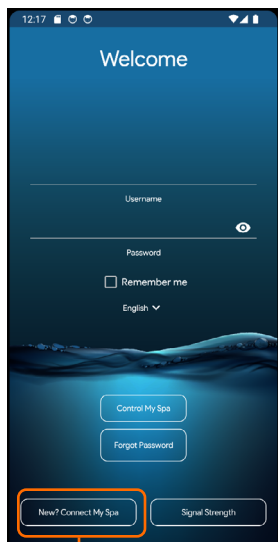


Select this.



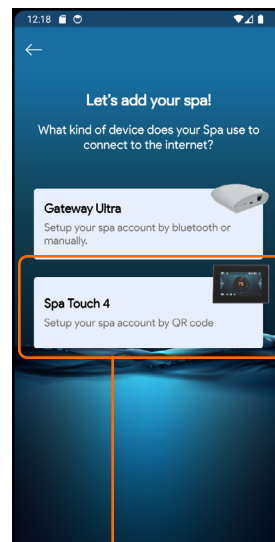
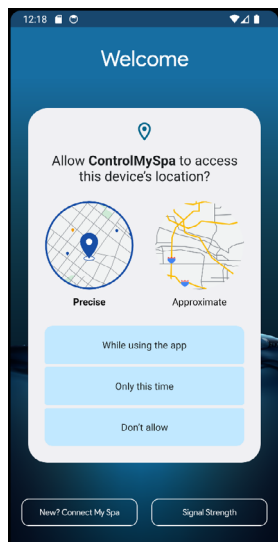


Select this.



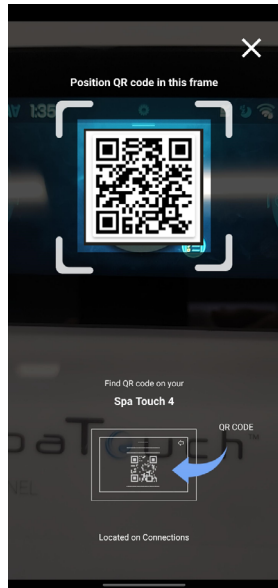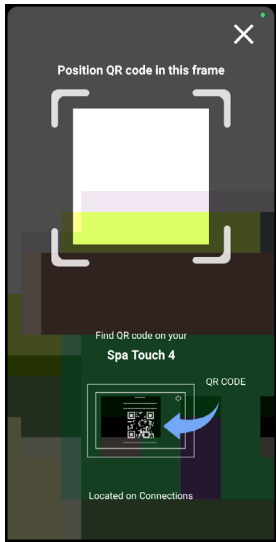

Enter the CMS code that is supplied by the OEM.

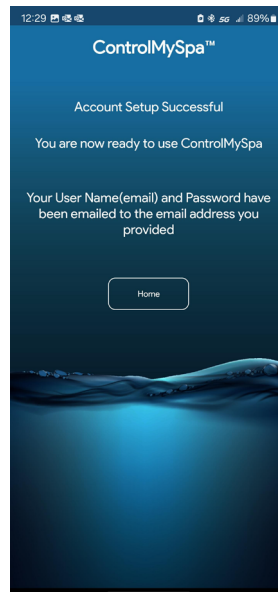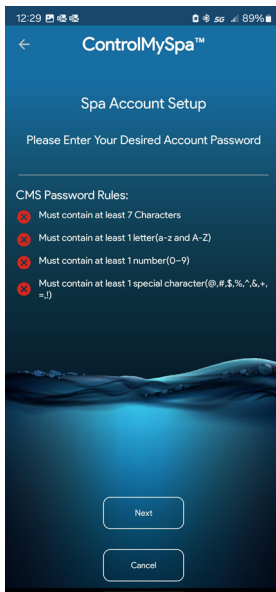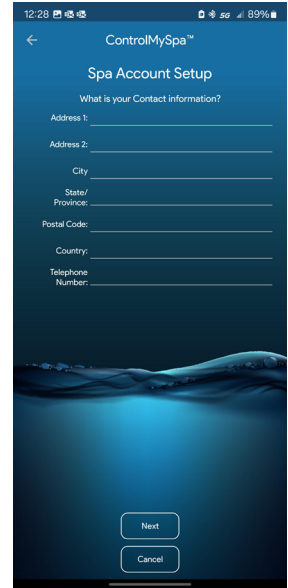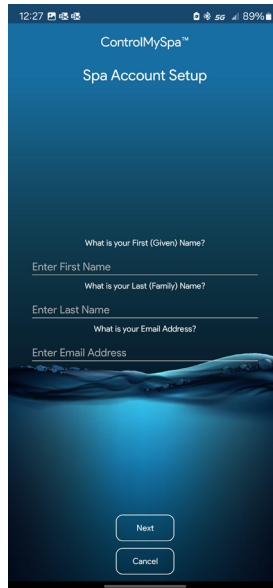

CMS format




Each OEM has a unique three letter code.

Each dealer has a unique five number code.


Marquis Spas code: H G V
Artesian Spas code: Z Z Q

BP2000 Wiring Diagram

Connect the Spa Touch 4 panel to either of these connectors.

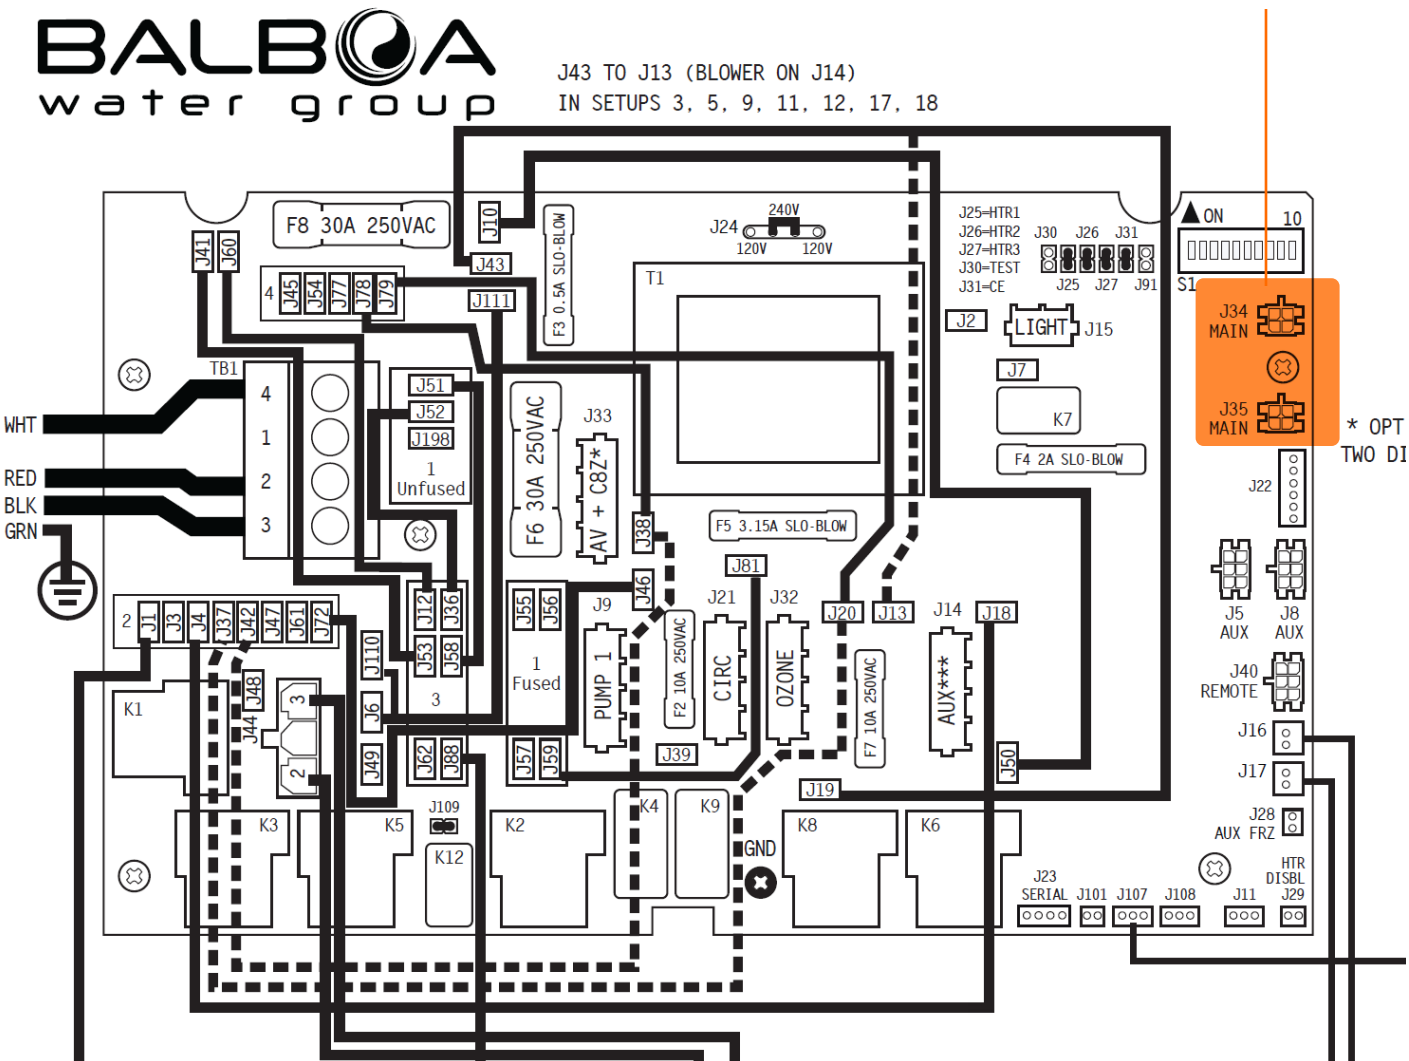


BP501 Wiring Diagram

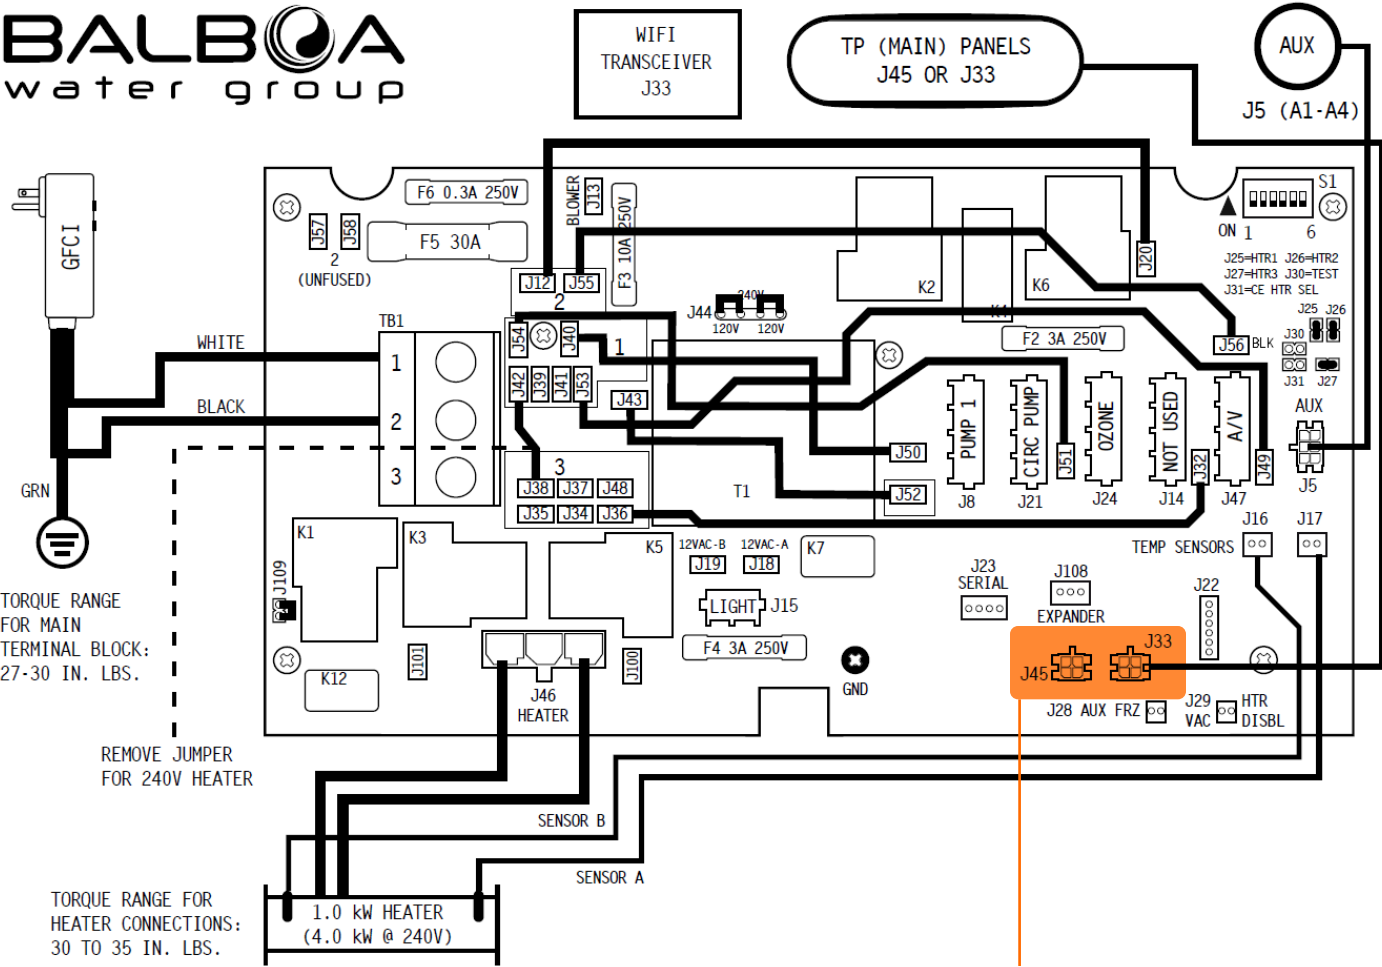

Connect the Spa Touch 4 panel to either of these connectors.

BP100 Wiring Diagram

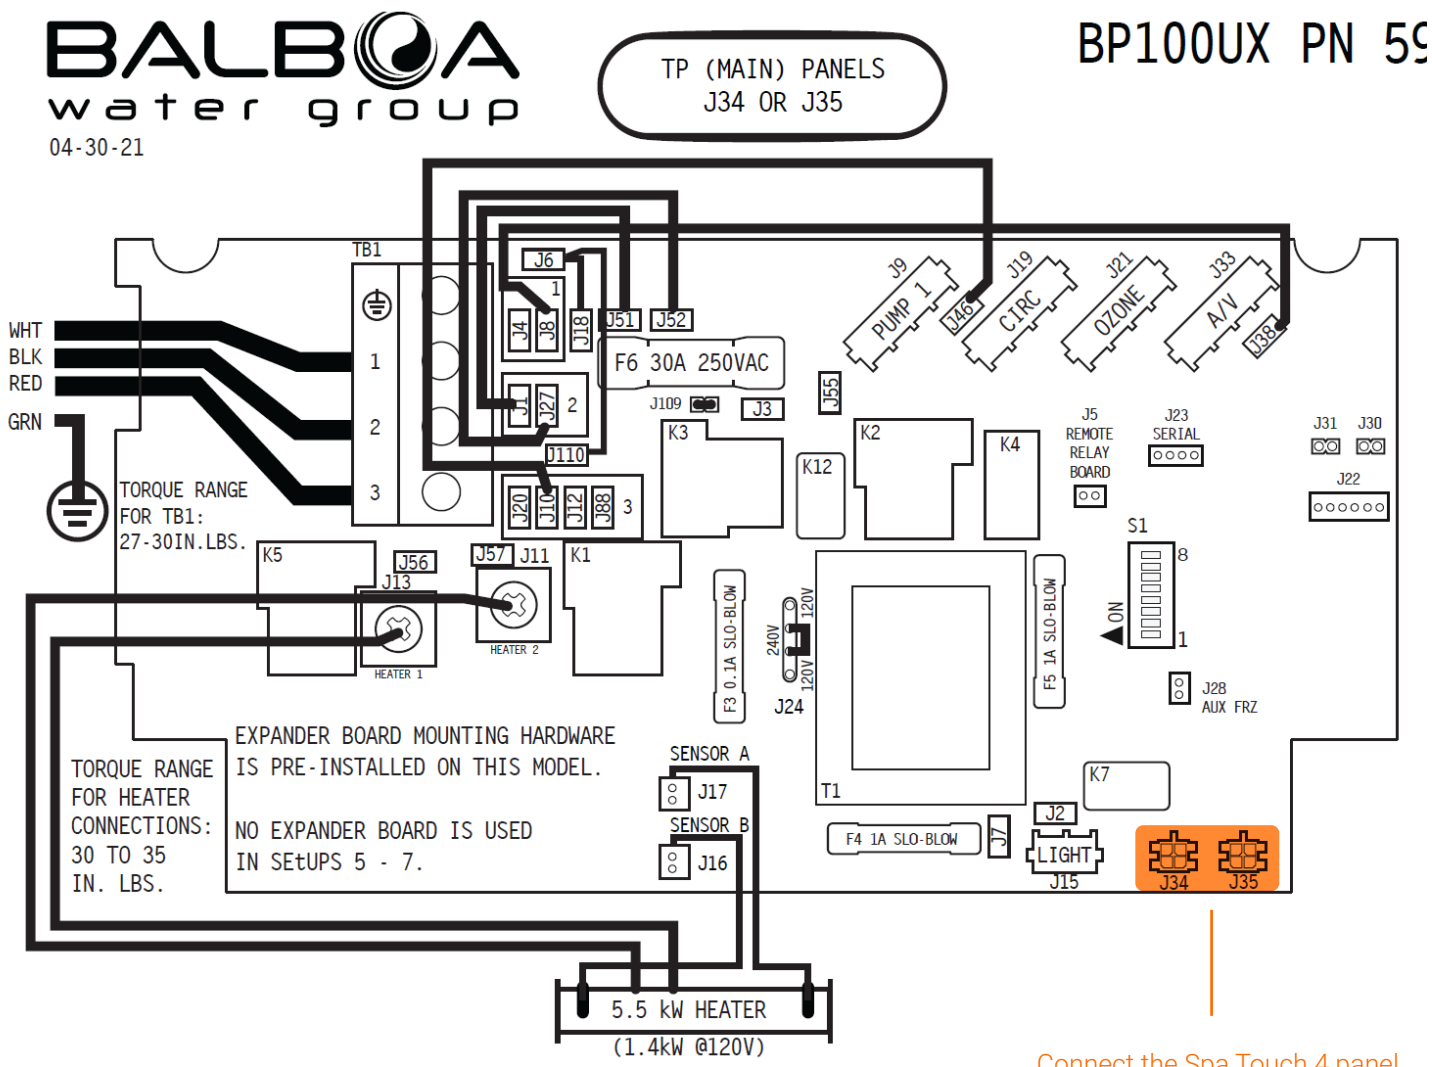



PLEASE VISIT US



Contact a sales representative
United States - sales@balboawater.com
Europe - europe@balboawater.com

Balboa
2020 Piper Ranch Road
San Diego, CA 92154
Phone: 714.384.0384
www.balboawater.com
Specifications subject to change without notice.